




IMAGECARE-320

Office Desktop Roll Laminator

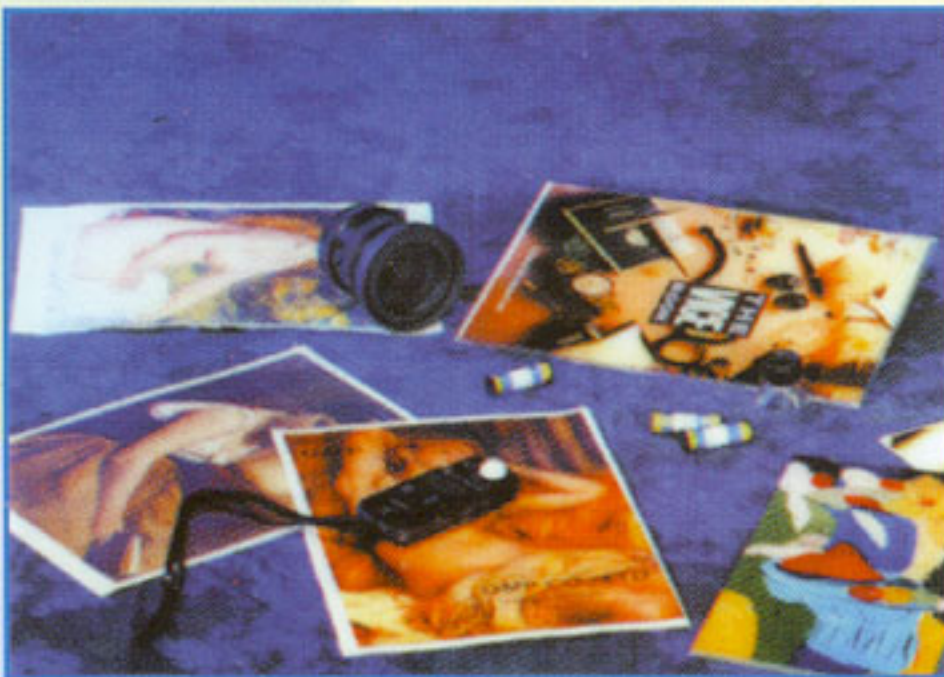

IMAGECARE-320



- ◆ Cost-Effective, High Performance, Simple Desktop Roll Laminator
- ◆ Easy roll film Installation and no tension control required
- ◆ Speed Lamination (1m/min)
- ◆ Easy to use and compact design
- ◆ Speed warm-up time using by Ruthenox heater



Laminex-Registered Trade Mark



 **GMP CO., LTD.**
www.gmp.com

IMAGECARE-320




Roll Laminator

IMAGECARE-320 is a easy, cost-effective laminator is designed to deliver a easy finishing job.

Features include user-friendly compact design and speed pre-heating.

It's easy to use, affordable and ideal for anyone from the entry-level user to the most experienced.

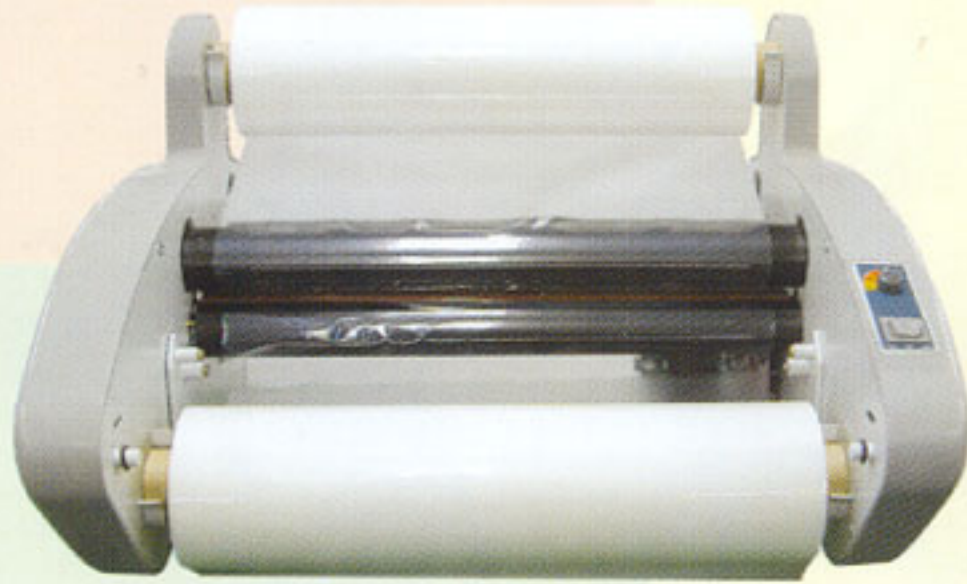

Specifications

Model Name	IMAGE CARE-320
Laminating Speed	1m/min
Laminating Width	320mm
Laminating Films	25mic~250mic
Thickness of substrate(Paper)	80g/m ² ~ 350g/m ²
Power Requirements	AC 220V-240V, 50/60Hz
Power Consumption	600W, 2.7A
Warm Up Time	2minutes
Heating System	Heatshoe Ruthenox Heater
Operating Temperature	130℃ Max.
Speed Control	Fixed
Temperature Control	Knob & Volume
Pressure Adjustment	Manual
Film Core	Plastic
Dimensions(WxLxH)	445 x 367 x 670mm
Type of Main Motor	Shading Pole Geard Motor t30

Copyright GMP 2003. All rights reserved. Reproduction by any means of any image in this catalogue is prohibited without the prior consent of GMP and its authorized agent

GMP reserves the right to after change specifications without prior notice.

- * Chromonex® : PP and PET composite Film
- * Photonex® : Heat Seal Laminating utilizing PVC material Film
- * Polynex® : Heat Seal Laminating utilizing OPP material Film
- * Micronex® : Heat Seal Laminating utilizing ultra thin dry overcoating Film